


WARNING – CONTENTS ARE FLAMMABLE AND MAY BE UNDER PRESSURE



Flammability Hazard



Spray Hazard

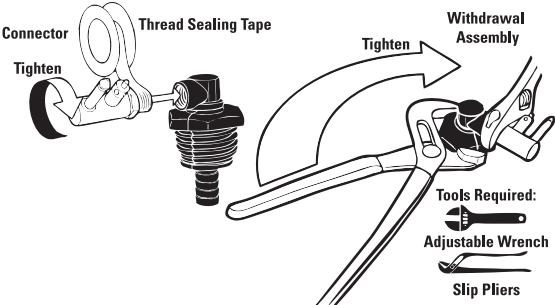

Connector

Thread Sealing Tape

Tighten

Withdrawal Assembly

Tighten

Tools Required:

- Adjustable Wrench
- Slip Pliers

How to install connectors:

Note: For ease of installation Withdrawal Assemblies are tightened down when shipped.

1. Ensure tank is empty.
2. Remove Withdrawal Assembly from the tank.
3. Apply Thread Sealing Tape to threads on Connector.
4. Hand tighten the Connector to the Withdrawal Assembly, then tighten another 1/4 turn with wrench.
5. Hand tighten the Withdrawal Assembly to the tank, then tighten another 3/4 of a turn with slip pliers while holding the Connector in the desired direction with wrench.